





Vertical sealing joints with a new minimal design

Example combination














OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275


- 5 mm safety glass.
- No profiles between the doors (only minimalist and transparent sealing)
- Magnetic closing system.
- For models with special and standard dimensions, compensation tolerance of \pm 20 mm for wall bevels and in combination with side panels compensation of ± 10 mm.
- Free entry width approx.: 40% of the total frontal width
- For the installation of the product, there must be more than 7cm of separation between the upper guide of the screen and the ceiling



WALL PROFILE

Duscho Plus Evolution®

Slider single door with 1 fixed panel, for shower in a recess WITHOUT LOWER GUIDE PROFILE.

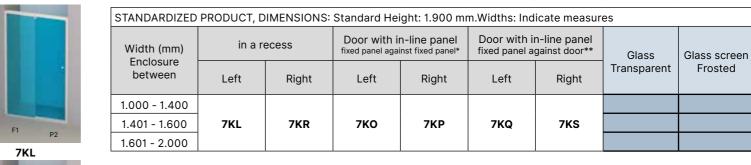

Width (mm) IN-LINE PANEL 90°									
600 - 1.000	-	-	7RF	7RG	7RF	7RG			

	ECIAL HEIG	HT Until 2.100) mm					
Width (mm) Enclosure between	in a recess		Door with in-line panel fixed panel against fixed panel*		Door with in-line panel fixed panel against door**		Glass	Glass screen
	Left	Right	Left	Right	Left	Right	Transparent	Frosted
1.000 ↔ 1.300								
1.301 ↔ 1.500	7KL	7KR	7KO	7KP	7KQ	7KS		
1.501 ↔ 2.000								
Width (mm) IN-LI	NE PANEL 9	O ₀						
180 ↔ 500	_	_	7RF	7RG	7RF	7RG		
		1	/ 131	71.0	/ / / /	71.0		
501 ↔ 1.000								
501 ↔ 1.000 Width (mm) IN-LI	NE PANEL 9	0° on knee-wa	all (join alway	s a sketch)				
			all (join alway	's a sketch)				
Width (mm) IN-LI	NE PANEL 90	0° on knee-w	all (join alway	s a sketch)	-	-		
Width (mm) IN-LI 180 ↔ 500	7NI	7ND	-	-	- always a sket	- ch)		

PRICE INCREASING	
DUSCHOLUX CareTec® Pro Glass Protection coating on the door	INCLUDED
DUSCHOLUX CareTec® Pro Glass Protection coating on the in-line panel	INCLUDED
Adjustments on the glass: (send sketch, please consult)	

