



Réf. 41L



Interior cleaning without obstacles.



OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- 1 fixed segment and pivot single door outwards and inwards until 160 mm. + Fixed panel until 1350 mm.
- 8 mm safety glass on the fixed panel (F1) and 6 mm on the door (P2).
- Free access approx.: Total width minus fixed segment width (F1).
- Includes supports wall bracket.
- 5 mm adaptation margin for out-of-true walls
- CAUTION: Pivot door (P2) is 300 mm width as standard, but can be manufactured from 250 mm to 650 mm if it is mentioned in order.



WALL PROFILE

D4 Pure20

FIXED + SIDE PANNELS

½ Pivot single door at 180° + 1 fixed segment for shower or bath + Side panels



41L



MEASURES: Standard Height 2.000 mm.					
Width Enclosure (mm)		Enclosure + In-line panel F3		Glass Transparent	Glass screen Frosted
		Left	Right		
1.100	In-line panel (F3) 670*	41L	41R		
	In-line panel (F3) 770*				
	In-line panel (F3) 870*				


*It must be ordered always based on the side panel (F3) width, and the front panel is always 1100mm. (F1 800 + P2 300).

SPECIAL MANUFACTURING AND FINISHES					
DIMENSIONS: Special Heights between 1.400 - 2.100 mm. Widths: Indicate product dimensions					
Width Enclosure (mm)		Enclosure + In-line panel F3		Glass Transparent	Glass screen Frosted
		Left	Right		
700 ↔ 1.600	In-line panel (F3) 501 ↔ 800*	41F	41G		
	In-line panel (F3) 801 ↔ 1.350*				

*It must be ordered always based on the side panel (F3) (join always a sketch)

ADJOINING IN-LINE PANEL ESPECIAL 90° Heights between 300 - 2.100 mm. (join always a sketch)			
Ancho (mm)	Left	Right	
200 ↔ 500	4MI	4MD	
501 ↔ 1.000			
1.001 ↔ 1.200			

PRICE INCREASING	
DUSCHOLUX CareTec® Pro Glass Protection coating	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

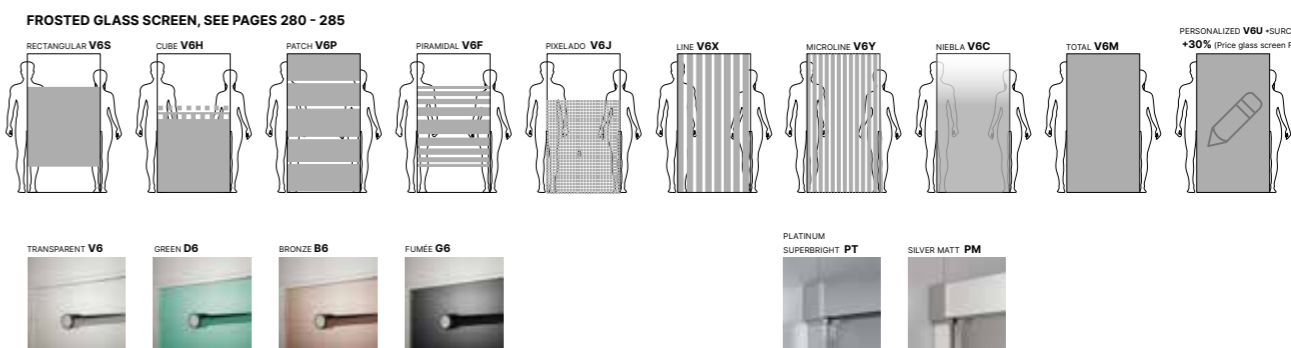

Example combination in-line panel.

