




Ref. 4RI Special with rounded edge



Interior cleaning without obstacles. OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- Overbath screen until 1200 mm..
- Pivot door (P2) 180° inwards and outwards.
- 8 mm safety glass on the fixed panel (F1) and 6 mm on the door (P2).
- Door glass screen with SQUARE or ROUND edge.
- Fixed panels width (F1/F4) will change in relation with product total width.
- + 5 mm adaptation margin for out-of-true walls




WALL PROFILE

D4 Pure20

1 F + PIVOT SINGLE

Pivot single door at 180° + 1 fixed segment for bath in a recess or in a corner.



4HI



180°

DIMENSIONS: Standard Height 1.500 mm.

Width Enclosure (mm)	Pivoting Door		Glass Transparent	Glass screen Frosted
	Left	Right		
5020 (In-line panel 180 mm)	4HI-700	4HD-700		
620 (In-line panel 180 mm)	4HI-800	4HD-800		
720 (In-line panel 180 mm)	4HI-900	4HD-900		
720 (In-line panel 280 mm)	4HI-1000	4HD-1000		

SPECIAL MANUFACTURING AND FINISHES

DIMENSIONS: Special Heights between 1400-1800 mm Door and fixed segment width made-to-measure (join always a sketch)

Width Pivoting Door (mm) between	Pivoting Door RECTANGULAR EDGE		Pivoting Door ROUNDED EDGE		Glass Transparent	Glass screen Frosted
	Left	Right	Left	Right		
700 ↔ 800						
801 ↔ 1.000	4HI	4HD	4RI	4RD		
1.001* ↔ 1.200						

* From 1.101 mm, the increase of dimension will be applied on the fix panel of 280 mm.



ADJOINING IN-LINE PANEL ESPECIAL 90° Heights between 300 - 2.100 mm. (join always a sketch)

Ancho (mm)	Left	Right		
200 ↔ 500				
501 ↔ 1.000	4MI	4MD		
1.001 ↔ 1.200				

PRICE INCREASING

DUSCHOLUX CareTec® Pro Glass Protection coating	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

FROSTED GLASS SCREEN, SEE PAGES 280 - 285

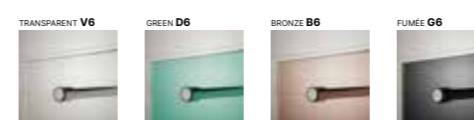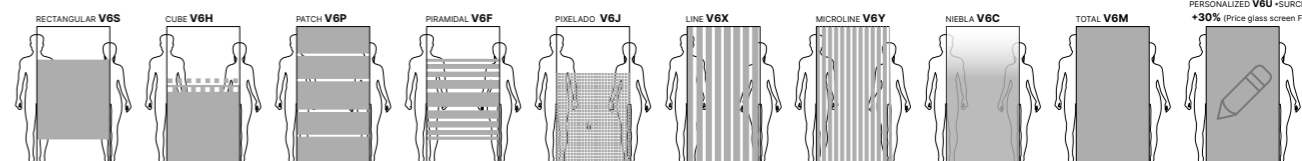

Example combination in-line panel.

