



Réf. 411




Interior cleaning without obstacles.



OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- 1 fixed segment and pivot single door outwards and inwards until 1.600 mm.
- 8 mm safety glass on the fixed panel (F1) and 6 mm on the door (P2).
- Free access approx.: Total width minus fixed segment width (F1).
- Includes support wall bracket.
- 5 mm adaptation margin for out-of-true walls
- CAUTION: Pivot door (P2) is 300 mm width as standard, but can be manufactured from 250 mm to 650 mm if it is mentioned in order.




WALL PROFILE

D4 Pure20

FIXED

½ Pivot single door at 180° + 1 fixed segment for shower or bath



411



SPECIAL MANUFACTURING AND FINISHES

DIMENSIONS: Special Heights between 1400 - 2100 mm Widths: Indicate product dimensions

Width In-line panel (mm) between	In-line panel		Glass Transparent	Glass screen Frosted
	Left	Right		
700 ↔ 1.000	41I	41D		
1.001 ↔ 1.300				
1.301 ↔ 1.600				



ADJOINING IN-LINE PANEL ESPECIAL 90° Heights between 300 - 2.100 mm. (join always a sketch)

Ancho (mm)	Left	Right		
200 ↔ 500	4MI	4MD		
501 ↔ 1.000				
1.001 ↔ 1.200				

PRICE INCREASING

DUSCHOLUX CareTec® Pro Glass Protection coating	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

FROSTED GLASS SCREEN, SEE PAGES 280 - 285

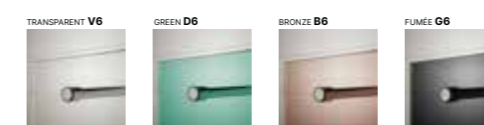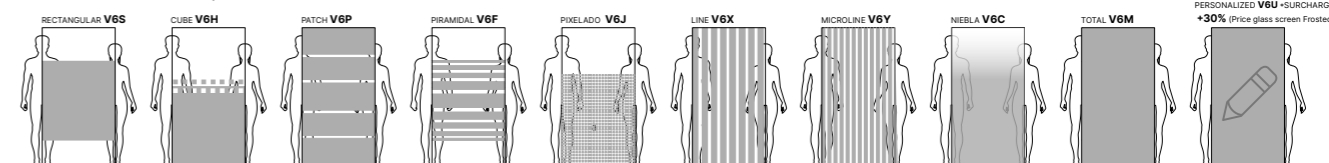

Example combination in-line panel.

