



Réf. 4GI



Interior cleaning without obstacles.



OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- Fixed panel (F1) until 1350 mm..
- 8 mm safety glass.
- 5 mm adaptation margin for out-of-true walls
- Includes support wall bracket at 45° for product until 1000 mm and at 90° for those superior to 1000 mm.



WALL PROFILE

D4 Pure20

FIXED

Glass screen of separation for shower or bath




4GI

SPECIAL MANUFACTURING AND FINISHES				
DIMENSIONS: Special Heights between 1400 - 2100 mm Widths: Indicate product dimensions				
Width In-line panel (mm) between	In-line panel		Glass Transparent	Glass screen Frosted
	Left	Right		
501 ↔ 1.000	4GI	4GD		
1.001 ↔ 1.350				

ADJOINING IN-LINE PANEL ESPECIAL 90° Heights between 300 - 2.100 mm. (join always a sketch)			
Ancho (mm)	Left	Right	
200 ↔ 500	4MI	4MD	
501 ↔ 1.000			
1.001 ↔ 1.200			

PRICE INCREASING	
DUSCHOLUX CareTec® Pro Glass Protection coating	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

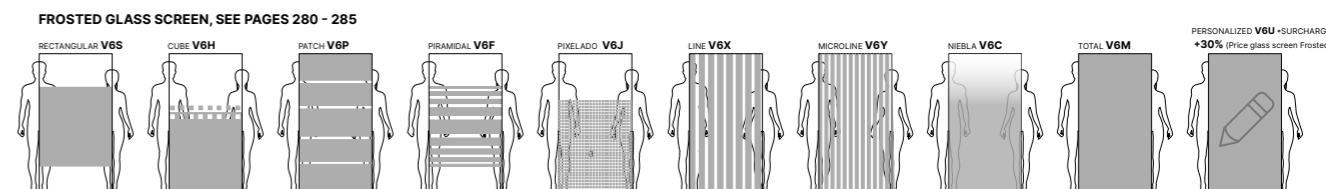

Example combination in-line panel.

