

D



Réf. 4UL



Interior cleaning without obstacles.



OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- Shower enclosures in a recess until 1.000 mm.
- 6 mm safety glass.
- Pivot door (P1) 180° inwards and outwards.
- Free access approx.: Total width minus 3 cm.
- Side magnetic closing.
- -5 mm. +2 mm. adaptation margin for out-of-true walls



WALL PROFILE

D4 Pure20

PIVOT SIGLE

Pivot single door 180°

DIMENSIONS: Standard Height 1988 mm.




SPECIAL MANUFACTURING AND FINISHES								
DIMENSIONS: Special Heights between 1.601 - 2.100 mm								
Width (mm) Enclosure between	in a recess		Door with in-line panel with 90° magnetic closing		Door with in-line panel with 180° magnetic closing		Glass Transparent	Glass screen Frosted
	Left	Right	Left	Right	Left	Right		
400 ↔ 600								
601 ↔ 800	4UL	4UR	4UF	4UG	4UA	4UC		
801 ↔ 1.000								

Width (mm) IN-LINE PANEL 180°							Heights between 300 - 2.100 mm. (join always a sketch)	
125 ↔ 500								
501 ↔ 1.000	-	-	-	-	4RL	4RR		
1.001 ↔ 1.200								

Width (mm) IN-LINE PANEL 90°							Heights between 1.400 - 2.100 mm. (join always a sketch)	
300 ↔ 500								
501 ↔ 1.000	-	-	4LI	4LD	-	-		
1.001 ↔ 1.350								

Width (mm) IN-LINE PANEL SUSPENDED							Heights between 800 - 2.100 mm. (join always a sketch)	
300 ↔ 500								
501 ↔ 1.000	-	-	4NI	4ND	-	-		
1.001 ↔ 1.200								
1.201 ↔ 1.350								

PRICE INCREASING	
DUSCHOLUX CareTec® Pro Glass Protection coating on the door	
DUSCHOLUX CareTec® Pro Glass Protection coating on the in-line panel	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

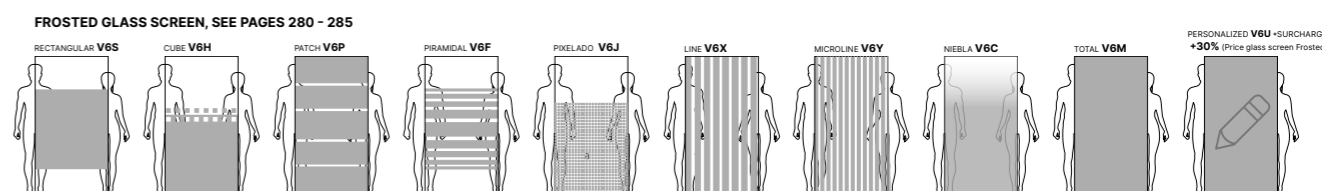

Example combination in-line panel.

