

D



Réf. 4PF + 4PG




Interior cleaning without obstacles.



OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- Enclosures until 1400 mm..
- Pivot door (P2) 180° inwards and outwards.
- 8 mm safety glass on the fixed panel (F1) and 6 mm on the door (P2).
- Fixed panel width (F1) will change in relation with product total width.
- Side magnetic closing.
- 5 mm adaptation margin for out-of-true walls



WALL PROFILE



D4 Pure20

PIVOT SIGLE

Pivot twin door 180° + 2 In-line panels, for shower with angle access

MEASURES: Standard Height 1988 mm.

SPECIAL MANUFACTURING AND FINISHES

DIMENSIONS: Special Heights between 1.600 - 2.100 mm. Door and fixed segments width made-to-measure (join always a sketch)

Width (mm) Enclosure between	shower with angle access.		Glass Transparent	Glass screen Frosted
	Left	Right		
700 ↔ 900	4PF	4PG		
901* ↔ 1.200				
1.201 ↔ 1.400				

* Fix panel (F1) width 180mm. From 951mm, the increase of dimension will be applied on the fix panel.

For the price calculation of the corner entry version, must be SUMMED the amounts for the left and right side of the shower enclosure in the required dimensions.



ADJOINING IN-LINE PANEL ESPECIAL 90° Heights between 300 - 2.100 mm. (join always a sketch)

Ancho (mm)	Left	Right		
200 ↔ 500	4MI	4MD		
501 ↔ 1.000				
1.001 ↔ 1.200				

PRICE INCREASING

DUSCHOLUX CareTec® Pro Glass Protection for shower with angle access	
DUSCHOLUX CareTec® Pro Glass Protection coating on the in-line panel	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

FROSTED GLASS SCREEN, SEE PAGES 280 - 285

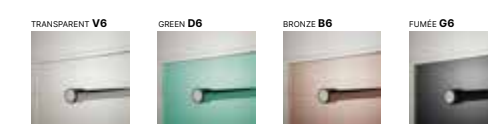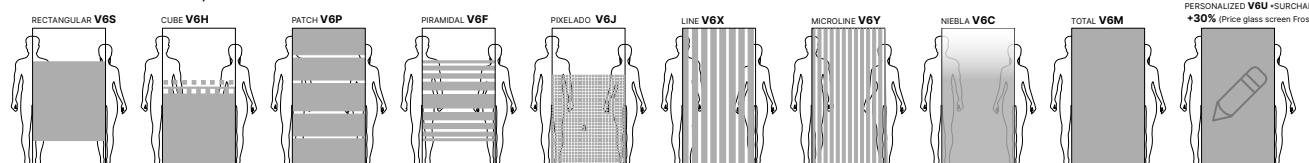

Example combination in-line panel.



in corner shower

