



Réf. 44C




Interior cleaning without obstacles.



OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

- Shower enclosures in a recess until 2100 mm...
- Pivot door (P2/P3) 180° inwards and outwards.
- 8 mm safety glass on the fixed panels (F1/F4) and 6 mm on the door (P2/P3).
- Fixed panels width (F1/F4) will change in relation with product total width.
- Central magnetic closing.
- 5 mm adaptation margin for out-of-true walls.




WALL PROFILE

D4 Pure20

PIVOT SIGLE

Pivot twin door 180° with 2 in-line panels, for shower in a recess

DIMENSIONS: Standard Height 1.988 mm. Standard In-line panel 180 mm

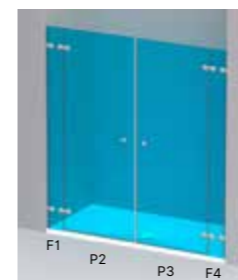

44C



180°

SPECIAL MANUFACTURING AND FINISHES

DIMENSIONS: Special Heights between 1.601 - 2.100 mm. Door and fixed segments width made-to-measure (join always a sketch)

Width (mm) Enclosure between	in a recess	Glass Transparent	Glass screen Frosted
900 ↔ 1.100	44C		
1.101 ↔ 1.300			
1.301 ↔ 1.500			
1.501 ↔ 1.700			
1.701 ↔ 1.900			
1.901* ↔ 2.100			

* Fix panel (F1) width 240mm. From 1.901mm, the increase of dimension will be applied on the fix panel.



ADJOINING IN-LINE PANEL ESPECIAL 90° Heights between 300 - 2.100 mm. (join always a sketch)

Ancho (mm)	Left	Right		
200 ↔ 500	4MI	4MD		
501 ↔ 1.000				
1.001 ↔ 1.200				

PRICE INCREASING

DUSCHOLUX CareTec® Pro Glass Protection coating on the door	
DUSCHOLUX CareTec® Pro Glass Protection coating on the in-line panel	
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

FROSTED GLASS SCREEN, SEE PAGES 280 - 285

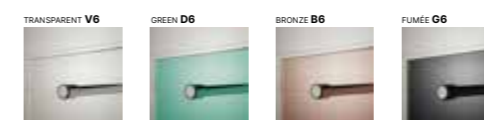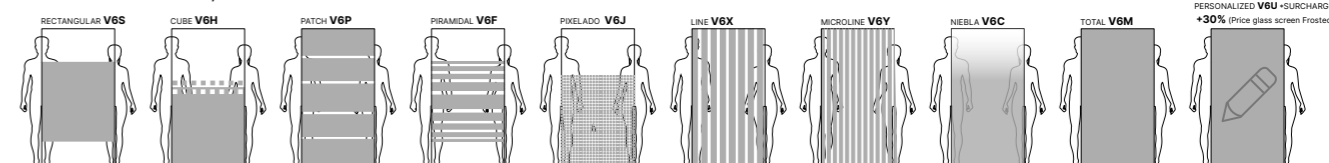

Example combination in-line panel.

