



Réf. UOD



**Push & Clean** function for an easy care and cleaning.





**Soft-close** function (damped closure) included. This allows to open and close the door softly.




OPTIONAL: TOWELBAR / SHELF-CRYSTAL see pages 275

**FROSTED GLASS SCREEN, SEE PAGES 280 - 285**

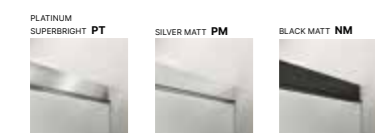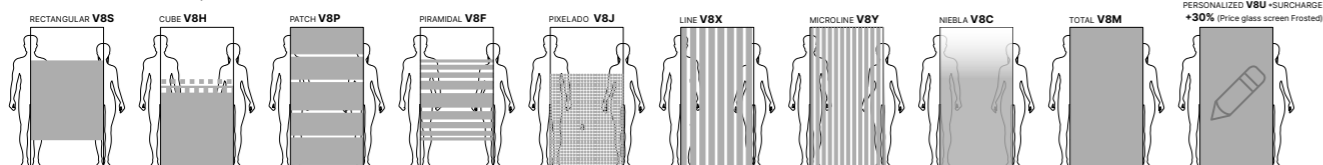

**CUSTOMIZABLE COATING FOR THE UPPER GUIDE PROFILE.**

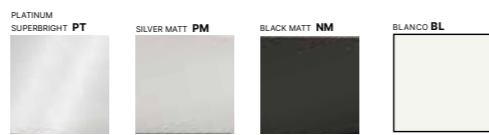

# D5 Custom20

1 F + SLIDER DOOR

Slider single door with 1 fixed panel, for shower.



UOI



UOD

MEASURES: Standard heights: 2.000 and 2.100 mm (always specify one of the two measures of height and width)				
Width In-line panel (mm) between	In-line panel		Glass Transparent	Glass screen Frosted
	Left	Right		
750 ↔ 1.100				
1.101 ↔ 1.500	<b>UOI</b>	<b>UOD</b>		
1.501 ↔ 1.800				

SPECIAL MANUFACTURING AND FINISHES				
DIMENSIONS: Special Heights from 1.601 - 2.100 mm. Door and fixed segments width made-to-measure (join always a sketch)				
Width In-line panel (mm) between	In-line panel		Glass Transparent	Glass screen Frosted
	Left	Right		
750 ↔ 1.100				
1.101* ↔ 1.500	<b>UOI</b>	<b>UOD</b>		
1.501* ↔ 1.800				

\* From 1.001 mm, the top guide will be fixed to the ceiling.  
 \*\* From 1.401 mm, the increase of dimension will be applied on the fix panel

## Slider single door with 1 fixed panel, for bath

MEASURES: Standard Height: 1.600 mm. Widths: Indicate measures				
Width In-line panel (mm) between	In-line panel		Glass Transparent	Glass screen Frosted
	Left	Right		
750 ↔ 1.100				
1.101 ↔ 1.500	<b>UOI</b>	<b>UOD</b>		
1.501 ↔ 1.800				

SPECIAL MANUFACTURING AND FINISHES				
DIMENSIONS: Special Heights from 1.400 - 1.600 mm. Door and fixed segments width made-to-measure (join always a sketch)				
Width In-line panel (mm) between	In-line panel		Glass Transparent	Glass screen Frosted
	Left	Right		
750 ↔ 1.100				
1.101* ↔ 1.500	<b>UOI</b>	<b>UOD</b>		
1.501* ↔ 1.800				

\* From 1.001 mm, the top guide will be fixed to the ceiling.  
 \*\* From 1.401 mm, the increase of dimension will be applied on the fix panel

PRICE INCREASING	
DUSCHOLUX CareTec® Pro Glass Protection coating	<b>INCLUDED</b>
Adjustments on the glass: (send sketch, please consult)	
Coloured Glass	

- Shower enclosures until 1.800 mm.
- 8 mm safety glass for the fixed panel (F1) and 8 mm for the door (P2).
- Free access: 40% of total width.
- Handle opening.
- Sealing bar (installation obligatory).
- Customizable upper profile guide with aluminium plate or Duscholux PanElle.